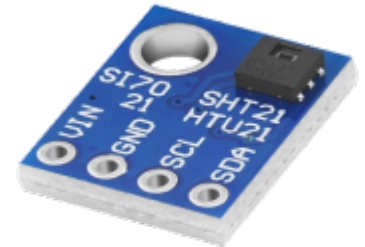


LamaPLC: HTU TE Connectivity temperature/humidity sensors with I²C communication

The HTUs are highly accurate, digital relative humidity and temperature sensors known for their low power consumption, I²C interface, and factory calibration.



Key Features

- **High Accuracy:**
 - **Humidity:** Typical accuracy of $\pm 2\%$ RH within the optimized range of 5% to 95% RH.
 - **Temperature:** Typical accuracy of $\pm 0.3^\circ\text{C}$ over an operating range of 0°C to 70°C .
- **Digital I²C Interface:** Uses the common I²C protocol for easy integration with most microcontrollers (e.g., Arduino, ESP32, Raspberry Pi), requiring only two data lines (SDA and SCL) in addition to power.
- **Low Power Consumption:** Designed for battery-powered and power-sensitive applications, with current consumption as low as $0.14\mu\text{A}$ in sleep mode.
- **Wide Operating Range:**
 - **Humidity:** 0% to 100% RH range.
 - **Temperature:** -40°C to 125°C range.
- **Selectable Resolution:** The resolution can be configured by the user, ranging from 8/12 bits for RH/T to a maximum of 12/14 bits for RH/T, allowing a trade-off between measurement speed and precision.
- **Fast Response Time:** Offers a typical humidity response time of 5 seconds.
- **Factory Calibrated & Linearized:** Each sensor is individually calibrated and provides a linearized digital signal, eliminating the need for complex calibration routines in the host device.
- **Integrated Fault Detection:** Includes a checksum (CRC) feature to improve communication reliability and an electronic identification code stored on the chip for traceability.
- **Protective Filter Option:** The HTU21D(F) variant includes an optional hydrophobic PTFE filter that protects the sensor from dust and water immersion, preserving performance in demanding environments.
- **Full Interchangeability:** No calibration is required when swapping sensors under standard conditions.



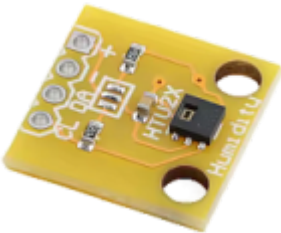
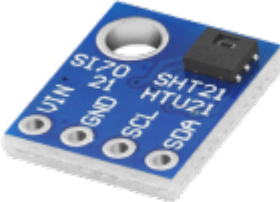

If you'd like to support the development of the site with the price of a coffee — or a few — [please do so here](#).

Here's a handy tip: you can quickly save this page as a PDF by clicking "export to PDF" in the menu on the right side of the screen.

2026/02/14 23:38

Difference between HTU31D, HTU21D and HTU20D

The primary difference among the HTU20D, HTU21D, and HTU31D is an incremental improvement in accuracy, supply-voltage range, and power consumption as the model number increases. The sensors are largely interchangeable and use the same I²C communication protocol.

Specification	HTU20D	HTU21D	HTU31D
			
Similar types	SHT20, HTU20, Si702, GY-20 ¹	SHT21, HTU21, Si7021, GY-21, GY-213V, HDC1080 ²	SHT31, HTU31, Si7031, GY-31 ³
Humidity Accuracy (Typical)	±5% RH	±2% RH	±2% RH
Temperature Accuracy (Typical)	Not specified in source	±0.3°C	±0.2°C
Supply Voltage Range	1.5V - 3.6V	1.5V - 3.6V	3V - 5.5V
Power Consumption (Sleep)	Not specified	~0.14 µA	~0.14 µA (estimated based on similar operation)
Interface	I ² C	I ² C	I ² C
Filter Option	HTU20D(F) option available	HTU21D(F) option available	HTU31D(F) option available

¹: The SHT20, HTU20, Si702, GY-20 are different manufacturers' versions of essentially the same I²C digital humidity and temperature sensor chip, designed to be hardware- and software-compatible. The GY-20 is a generic breakout board that uses one of these chips.

²: The SHT21, HTU21, Si7021, GY-21, GY-213V, HDC1080 are very similar digital humidity and temperature sensor chips from different manufacturers (Sensirion, Measurement Specialties, and Silicon Labs, respectively), while the GY-21 is a generic breakout board that uses one of these chips. They are largely interchangeable in hardware and software for most general-purpose applications.

³: The SHT31, HTU31, Si7031, and GY-31 are high-accuracy digital temperature and humidity sensor chips from different manufacturers (Sensirion, TE Connectivity, and Silicon Labs, respectively) that are designed to be largely interchangeable. The GY-31 is a generic name for a breakout board that typically uses the SHT31 chip.

Arduino & HTU31D

To read the HTU31D, the most reliable method is to use the **Adafruit HTU31D** Library. Compared to

the older HTU21D, this sensor handles a wider voltage range (3V–5.5V) and offers even better precision.

Wiring (I²C)

- **VIN:** 3.3V or 5V
- **GND:** Ground
- **SCL:** Pin A5 (on Uno/Nano)
- **SDA:** Pin A4 (on Uno/Nano)
- **ADR Pin:** Leave disconnected for default address **0x40**. Connect to VIN for 0x41.

Arduino Example Code

Install the **Adafruit HTU31D** and **Adafruit BusIO** libraries via the Arduino Library Manager.

```
#include <Wire.h>
#include "Adafruit_HTU31D.h"

Adafruit_HTU31D htu = Adafruit_HTU31D();

void setup() {
  Serial.begin(115200);
  while (!Serial) delay(10);

  Serial.println("HTU31D test");

  if (!htu.begin(0x40)) { // Use 0x41 if ADR pin is tied to High
    Serial.println("Couldn't find sensor!");
    while (1);
  }
}

void loop() {
  sensors_event_t humidity, temp;

  // Get both temperature and humidity at once
  htu.getEvent(&humidity, &temp);

  Serial.print("Temp: ");
  Serial.print(temp.temperature);
  Serial.print(" C \t");

  Serial.print("Humidity: ");
  Serial.print(humidity.relative_humidity);
  Serial.println(" %");

  delay(1000);
}
```

Advanced Features

The HTU31D includes a built-in heater to dry the sensor if it accumulates condensation. You can toggle it in your code:

- `htu.enableHeater(true)`; Turn on heater
- `htu.enableHeater(false)`; Turn off heater

Resolution Settings

You can optimize for speed or precision using `htu.setResolutions(temp_res, hum_res)`.

- **Temperature:** 0.012°C to 0.04°C resolution.
- **Humidity:** 0.01% to 0.02% resolution.

I²C topics on lamaPLC

Page	Date	Tags
• lamaPLC Communication: 1-Wire	2026/04/23 21:51	1-wire , communication , bus , microlan , i2c , uart , usart , ds18b20
• lamaPLC Communication: I²C	2025/09/23 21:25	i2c , i c , smbus , philips , bus , communication , arduino
• lamaPLC project: Sension SCD CO² measurement module	2026/04/15 19:34	scd30 , scd40 , scd41 , iaq , ndir , sensor , i2c , arduino code
• LamaPLC: AHT10 Modul	2026/03/22 03:14	communication , i2c , temperature , humidity , sensor , aht , aht 10 , modul
• LamaPLC: AHT20 / BMP280 Modul	2026/04/23 21:52	bmp280 , aht20 , adafruit , temperature , humidity , pressure , sensor , arduino , code , i2c
• LamaPLC: APDS - Avago ALS and proximity detection sensors with I²C communication	2026/04/23 21:52	avago , apds-9900 , apds-9930 , apds-9960 , als , proximity , detection , gesture recognition , gesture , i2c , communication , sensor , arduino , code
• lamaPLC: Arduino Modul: BME680	2026/05/12 18:40	code , c , 2026 , arduino , bme680 , sensor , i2c , comunication
• lamaPLC: AS5600 Magnetic Induction Angle Measurement Sensor Module	2026/05/13 00:06	communication , i2c , as5600 , as-5600 , magnetic , induction , angle , sensor
• lamaPLC: Bi-Directional Logic Level Converter 3.3V ↔ 5V	2026/04/12 00:34	bi-directional , logic level converter , i2c , uart , spi
• LamaPLC: BMP/BME Bosch Temperature/Humidity/Pressure sensors with I²C communication	2026/04/23 21:52	bme280 , bme680 , bme688 , bmp180 , bmp280 , hw-611 , hw611 , bosch , temperature , humidity , pressure , sensor , arduino , i2c , communication , ai , cjmcu , volatile organic compounds , vocs , volatile sulfur compounds , vscs , iaq
• LamaPLC: CJMCU-219/INA-219 breakout board/IC with I²C communication	2026/04/23 21:52	cjmcu-219 , ina-219 , ina219 , breakout board , i2c , communication , sensor , voltage , current , arduino , code , cjmcu
• LamaPLC: CJMCU-3216 / AP-3216 integrated digital ambient light and proximity sensor module/IC with I²C communication	2026/04/23 21:52	cjmcu-3216 , cjmcu , ap-3216 , ap3216 , ambient light , proximity , sensor , arduino , code , i2c , communication

• lamaPLC: CJMCU-811 CCS811 Gas Sensor (VOCs TVOC CO2)	2026/04/23 21:52	cjmcu-811 , ccs811 , gas , sensor , vocs , tvoc , eco2 , co2 , arduino , air quality metal oxide , mox , i2c , micropython , rp2040-eth
• LamaPLC: D6T Omron Non-Contact Thermal Sensors with I²C communication	2026/04/23 21:52	d6t , d6t-32l , d6t-44l , d6t-8l , d6t-1a , omron , non-contact , thermal , sensor , i2c , arduino , code
• LamaPLC: DPS Infineon Temperature/Pressure sensors with I2C communication	2026/04/23 21:52	dps310 , infineon , temperature , pressure , sensor , arduino , i2c , communication , code
• lamaPLC: Energy, power, current, and voltage	2025/05/31 23:32	i2c , i c , communication , arduino , energy , power , current , sensor , ina226
• LamaPLC: ENS ScioSense Multi-gas sensors with I²C communication	2026/04/23 21:52	ens160 , sciosense , gas-quality , i2c , communication , sensor , arduino , code , eco2 , tvoc , aqi , indoor air quality , iaq , co2 , voc
• lamaPLC: ESP32 / ESP8266	2025/11/22 00:07	esp8266 , esp32 , esp32-c2 , esp32-c3 , esp32-c5 , esp32-c6 , esp32-c61 , esp32-h2 , esp32-s2 , esp32-s3 , esp32-p4 , espressif systems , communication , ethernet , ip , wi-fi , thread , zigbee , matter , homekit , bluetooth , mqtt , adc , spi , uart , i2c , i2s , rmt , pwm , usb , usb otg , twai
• LamaPLC: Gas sensors	2023/07/01 17:29	gas , sensor , i2c , onewire , communication , mq-3 , mq-4 , mq-5 , mq-6 , mq-7 , mq-8 , mq-9 , mq-135 , gm-102b , gm-302b , gm-502b , gm-702b , alcohol , ch4 , natural gas , smoke , lng , co , co2 , lpg , h2 , iso-butane , nox , nh3 , benzene , town gas , formaldehyde , propane , humidity , temperature , voc , grv gas sens v2
• lamaPLC: GY-511 6DOF sensor module	2026/04/23 21:52	stmicroelectronics , lsm303dlhc , i2c , lsm303 , sensor , gy-511 , 6dof , pololu , module , arduino
• LamaPLC: GY-9250 MPU-9250/6500 9-axis Attitude Sensor Board	2026/04/23 21:52	ak8963 , gy-9250 , mpu-9250 , 9-axis , motion detection , magnetometer , communication , i c , i2c , spi
• LamaPLC: HDC Texas Instruments Temperature/humidity sensors with I²C communication	2026/04/23 21:52	sht21 , htu21 , si7021 , gy-21 , gy-213v , hdc1080 , gy-213v-hdc1080 , cjmcu , cjmcu-1080 , texas instruments , temperature , humidity , sensor , i2c , communication , arduino , code
• lamaPLC: HT16K33 display controller	2026/04/23 21:51	i2c , 7-segment display , display , ht16k33 , arduino
• LamaPLC: HTU TE Connectivity temperature/humidity sensors with I²C communication	2026/04/23 21:52	htu , htu31d , htu21d , htu20d , sht20 , htu20 , sht21 , htu21 , si7021 , gy-21 , gy-213v , hdc1080 , si702 , gy-20 , sht31 , htu31 , si7031 , gy-31 , te connectivity , temperature , humidity , i2c , communication , sensor , arduino , code

• lamaPLC: INA modules with Arduino libraries	2026/04/23 21:52	i2c , i c , communication , arduino , energy , power , current , monitor , sensor , ina219 , gy-219 , ina226 , gy-216 , ina228 , gy-228 , ina237 , ina238 , ina260 , ina3221 , ina
• lamaPLC: INA226 - current/voltage/power monitor with I²C communication	2026/04/23 21:52	i2c , i c , communication , arduino , energy , power , current , monitor , sensor , ina226 , ina219 , ina
• lamaPLC: LCD 1602/2004 with I²C communication	2026/02/14 18:27	communication , i2c , display , lcd , 1602 , 2004 , hd44780 , pcf8574 , pcf8574t , pcf8574at , arduino
• LamaPLC: MAX30100/MAX30102 Heart Rate Click Sensor Module	2026/04/23 21:52	max30102 , max30100 , heart rate click , sensor , communication , i2c , arduino , code
• lamaPLC: MCP23017 / MCP23S17 16-Bit I/O Expander with Serial Interface I²C / SPI	2026/04/23 21:52	communication , i2c , mcp23017 , mcp23s17 , spi , i o expander , serial , cjmcu-2317 , cjmcu
• lamaPLC: MLX90614 (GY-906) infrared non-contact thermometer	2026/05/08 00:03	communication , i2c , temperature , mlx90614 , gy-906 , modul , infrared , non-contact thermometer , dsp , pwm , smbus , hailege
• lamaPLC: PCF857x I/O Expander chip/modul with I²C communication	2026/05/15 01:03	communication , i2c , pcf857x , pcf8574 , pcf8574a , pcf8575 , i o expander , i o extension , nxp , texas instruments
• LamaPLC: Pixart PAJ7620U2 Gesture recognition sensors/module with I²C communication	2026/04/23 21:52	paj7620u2 , gy-paj7620 , pixart , gesture recognition , i2c , communication , sensor , arduino , code
• lamaPLC: RP2040_ETH_Modul: I²C scanner	2026/05/12 16:20	code , micropython , 2026 , rp2040 eth , i2c , comunication
• lamaPLC: RP2040_ETH_Modul: MLX90614 simple	2026/05/12 17:06	code , micropython , 2026 , rp2040 eth , i2c , communication , mlx90614
• lamaPLC: RP2040_ETH_Modul: Read BME 680/688 sensor data	2026/05/12 21:06	code , micropython , 2026 , rp2040 eth , bme680 , i2c , sensor , communication
• lamaPLC: RP2040_ETH_Modul: Read BME 680/688 sensor data and store in Modbus input registers	2026/05/12 18:58	code , micropython , 2026 , rp2040 eth , bme680 , i2c , sensor , communication
• LamaPLC: SC16IS750 / SC16IS752: One or two serial (UART) ports from microcontroller via I²C or SPI communication	2026/04/23 21:52	cjmcu-750 , cjmcu-752 , cjmcu , nxp , sc16is750 , sc16is752 , uart , serial , i2c , spi , modul , converter , arduino , code
• LamaPLC: SGP Sensirion TVOC/VOC sensors with I²C communication	2026/04/15 19:41	sgp30 , sgp40 , sgp41 , sensirion , gas-sensor , i2c , communication , sensor , arduino , code , eco2 , voc , tvoc , indoor air quality , iaq , nox , hydrogen
• LamaPLC: SHT Sensirion Temperature/humidity sensor with I²C communication	2026/04/23 21:52	sht20 , sht21 , sht25 , sht30 , sht31 , sht35 , sht40 , gy21 , temperature , humidity , i2c , communication , sensor , arduino , code
• lamaPLC: Signal level converters	2026/02/14 23:47	pca9306 , i2c , voltage , level , converter

• lamaPLC: st756x display drivers	2026/05/20 16:17	display, driver, i2c, spi, lcd, cog, oled, st7565, st7567, gm12864, gm12864-59n, gm12864-03a, gm12864-01a, gme12864-41
• lamaPLC: TCA9548A (HW617); Low-Voltage 8-Channel I²C Switch Module	2026/02/14 23:51	tca9548a, hw617, i2c, switch, communication, expansion board, arduino
• lamaPLC: TM1637 7-segment display	2026/02/14 18:26	i2c, 7-segment display, display, tm1637, arduino
• LamaPLC: TOFnnnC STMicroelectronics Time-of-Flight (ToF) sensors with I²C communication	2026/04/23 21:52	tof050c, vl6180, tof200c, vl53l0x, tof400c, vl53l1x, stmicroelectronics, time-of-flight, tof, i2c, communication, sensor, arduino, code
• LamaPLC: VL53Lnn STMicroelectronics time-of-flight (ToF) laser-ranging sensors with I²C communication	2026/04/23 21:52	vl53l0x, vl53l1x, vl53l0 1xv2, gy-530, time-of-flight, tof, laser-ranging, i2c, communication, sensor, arduino, code
• LamaPLC: VL6180X STMicroelectronics Time-of-Flight (ToF) sensor with I²C communication	2026/04/23 21:52	vl6180x, stmicroelectronics, time-of-flight, tof, i2c, communication, sensor, arduino, code
• lamaPLC: XGZP68xx: Silicon Pressure Sensors/Module	2026/05/15 15:17	communication, i2c, sensor, modul, pressure, cfsensor, xgzp68xx, xgzp6810d, xgzp6857d, xgzp6859d, xgzp6887d, xgzp6897d, xgzp6899a, piezoresistive, capacitive
• Magnetic angle sensors	2026/03/05 21:19	magnetic angle sensor, magnetic flux, sensor, spi, i2c, pwm, communication, modul, as5047p, as5600, mt6701, mt6816, mt6835, tle5012b, amr, gmr, tmr, anisotropic magnetoresistive
• SSH1106/SSD1306 OLED Display with I²C communication	2026/02/14 18:27	i2c, oled, display, ssh1106, sh1106, ssh1106, arduino, cmos

[HTU](#), [HTU31D](#), [HTU21D](#), [HTU20D](#), [SHT20](#), [HTU20](#), [SHT21](#), [HTU21](#), [Si7021](#), [GY-21](#), [GY-213V](#), [HDC1080](#), [Si702](#), [GY-20](#), [SHT31](#), [HTU31](#), [Si7031](#), [GY-31](#), [TE Connectivity](#), [temperature](#), [humidity](#), [i2c](#), [communication](#), [sensor](#), [arduino](#), [code](#)

This page has been accessed for: Today: 1, Until now: 164

From:
<https://www.lamaplc.com/> - **lamaPLC**

Permanent link:
<https://www.lamaplc.com/doku.php?id=sensor:htu>

Last update: **2026/04/21 20:47**

