

# lamaPLC: XGZP68xx: Silicon Pressure Sensors/Module

The **CFSensor XGZP68xx series** features high-performance silicon pressure sensors combined with an ASIC for calibration and temperature compensation.



Silicon pressure sensors typically use one of two main methods:

**Piezoresistive:** Resistors are placed on a thin silicon diaphragm. When pressure bends the diaphragm, the resistance changes, which is measured as a voltage.

**Capacitive:** Pressure changes the distance between two plates (one of which is a silicon diaphragm), altering the electrical capacitance.

The table below compares several well-known sensor types, which can be found on [aliexpress.com](https://www.aliexpress.com) or [amazon.de](https://www.amazon.de):


Sensor Type	Communication	Operating Range	Performance (Range/Type)	Efficiency	Special Properties
<b>XGZP6810D</b>	Digital I <sup>2</sup> C	3.0V - 5.5V	±125Pa / ±500Pa (Differential)	High-speed sampling	Ultra-sensitive; alternative to Sensirion SDP810.
<b>XGZP6847D</b>	Digital I <sup>2</sup> C	2.5V - 5.5V	-100kPa to 1500kPa (Gage)	~5uA sleep current	DIP6 package; widely used for blood pressure and appliances.
<b>XGZP6857D</b>	Digital I <sup>2</sup> C	3.3V or 5.0V	0-10kPa to 1000kPa (Gage)	Low power consumption	SOP6 package; compact footprint for consumer electronics.
<b>XGZP6859D</b>	Digital I <sup>2</sup> C	2.5V - 5.5V	0 to 200kPa (Vacuum/Gage)	Stable ratiometric output	Features a barb inlet pipe for secure tubing connections.
<b>XGZP6887D</b>	Digital I <sup>2</sup> C	3.3V or 5.0V	-100kPa to 1000kPa (Gage)	Calibrated /Compensated	J-lead SOP8 package; high reliability for industrial sensors.
<b>XGZP6897D</b>	Digital I <sup>2</sup> C	3.3V or 5V	-100kPa to 200kPa (Differential)	Optimized for I <sup>2</sup> C bus	Dual-port layout for measuring air flow or filter drop.
<b>XGZP6899A</b>	Analog	5V (Standard)	-100kPa to 700kPa (Differential)	Ratiometric (VCC dependent)	Provides calibrated analog signal for simple A/D inputs.

## Key Selection Guide

- **For Arduino/ESP32:** Stick to the “D” models (Digital I<sup>2</sup>C) to avoid external ADC calibration and reduce wiring.
- **For Ultra-Low Pressure:** Use the XGZP6810D for sensitive tasks like HVAC air flow or medical ventilators.
- **For Liquid/Vacuum:** The XGZP6859D is specifically designed for vacuum detection with a barb inlet.
- **Analog Preference:** If your system lacks I<sup>2</sup>C, the XGZP6899A is the analog version of the 6899D.

**Note:** Always check the voltage suffix (e.g., 33 for 3.3V or 50 for 5.0V) to match your microcontroller logic levels.

## XGZP6847: Fully calibrated silicon pressure sensor module

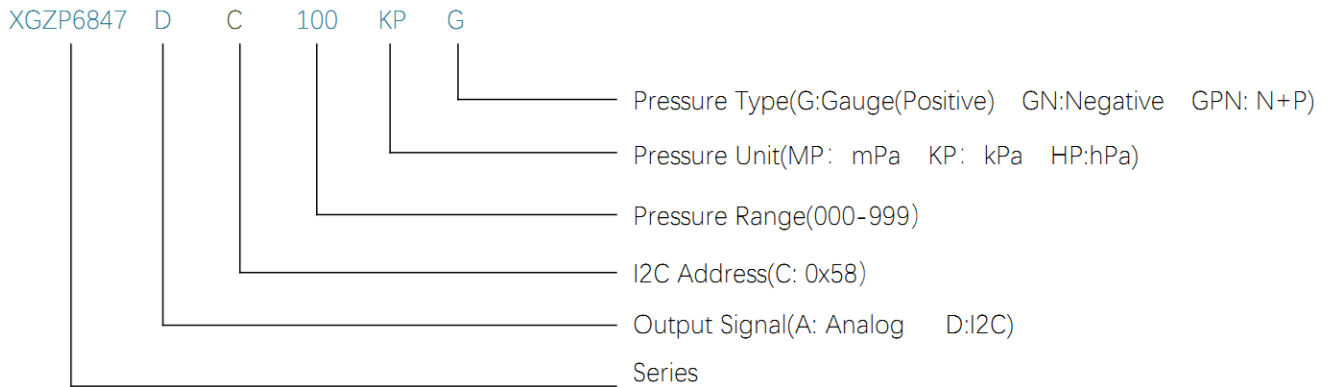

Note: Custom requirement or parameter(e.g pressure range, output etc.), consult with CFSensor on Part Number.

### XGZP6847D

The **XGZP6847D** is a fully calibrated silicon pressure sensor module designed for air and non-corrosive gases. It combines a MEMS pressure die with an integrated ASIC to provide direct digital readings via I<sup>2</sup>C, eliminating the need for complex external amplification or calibration.



### Technical Specifications

- **Pressure Range:** Covers a vast span from -100kPa to 1500kPa (model-specific).
- **Accuracy:** Typically ±2% FSS (Full Scale Span) for ranges between 10kPa and 200kPa, and ±2.5% FSS for other ranges.
- **Resolution:** 21-bit for pressure and 16-bit for temperature readings.
- **Power Supply:** Operates between 2.5V and 5.5V DC, with a default test voltage of 3.3V.
- **Current Consumption:** Very low, typically around 1.8mA during active measurement and as low as 100nA in standby.
- **Temperature Compensation:** Calibrated for accurate performance between 0°C and +60°C.



If you'd like to support the development of the site with the price of a coffee — or a few — [please do so here](#).

Here's a handy tip: you can quickly save this page as a PDF by clicking "export to PDF" in the menu on the right side of the screen.

2026/02/14 23:38

## XGZP6897D: specialized differential pressure sensor

The XGZP6897D is a specialized differential pressure sensor designed to measure the difference between two air sources. It is widely used in airflow systems (such as Pitot tubes), HVAC filters, and medical ventilators.



### Core Technical Specifications

- **Pressure Type:** Differential (compares pressure between two ports).
- **Pressure Range:** Extremely flexible, from  $\pm 0.5\text{kPa}$  up to  $\pm 200\text{kPa}$ .
- **Output:** 24-bit Digital (I<sup>2</sup>C interface) for pressure; 16-bit for temperature.
- **Accuracy:** Typically  $\pm 2\%$  Span (for ranges  $>10\text{kPa}$ ) or  $\pm 2.5\%$  Span (for ranges  $<10\text{kPa}$ ).
- **Power Supply:** Flexible 2.5V to 5.5V DC range.
- **Media:** Non-corrosive gases or dry air only.
- **Response Time:** Standard 20ms (10% to 90% step change).
- **Default Slave Address:** 0x6D

### Pinout

- **Pin 2:** GND (Ground)
- **Pin 3:** SDA (I2C Data)
- **Pin 4:** SCL (I2C Clock)
- **Pin 6:** VDD (Power)
- **Note:** Other pins (1, 5, 7, 8) are usually NC (No Connection) or factory-specific.
- **Capacitor:** A 100nF decoupling capacitor between VDD and GND is required for stable readings.

### Port Usage

- **P1 (High Port):** Connect to the higher pressure source.
- **P2 (Low Port):** Connect to the lower pressure source or leave open for Gage measurements.

## I<sup>2</sup>C topics on lamaPLC

Page	Date	Tags
• <a href="#">lamaPLC Communication: 1-Wire</a>	2026/04/23 21:51	<a href="#">1-wire</a> , <a href="#">communication</a> , <a href="#">bus</a> , <a href="#">microlan</a> , <a href="#">i2c</a> , <a href="#">uart</a> , <a href="#">usart</a> , <a href="#">ds18b20</a>

• <a href="#">lamaPLC Communication: I<sup>2</sup>C</a>	2025/09/23 21:25	<a href="#">i2c, i c, smbus, philips, bus, communication, arduino</a>
• <a href="#">lamaPLC project: Sension SCD CO<sup>2</sup> measurement module</a>	2026/04/15 19:34	<a href="#">scd30, scd40, scd41, iaq, ndir, sensor, i2c, arduino code</a>
• <a href="#">LamaPLC: AHT10 Modul</a>	2026/03/22 03:14	<a href="#">communication, i2c, temperature, humidity, sensor, aht, aht 10, modul</a>
• <a href="#">LamaPLC: AHT20 / BMP280 Modul</a>	2026/04/23 21:52	<a href="#">bmp280, aht20, adafruit, temperature, humidity, pressure, sensor, arduino, code, i2c</a>
• <a href="#">LamaPLC: APDS - Avago ALS and proximity detection sensors with I<sup>2</sup>C communication</a>	2026/04/23 21:52	<a href="#">avago, apds-9900, apds-9930, apds-9960, als, proximity, detection, gesture recognition, gesture, i2c, communication, sensor, arduino, code</a>
• <a href="#">lamaPLC: Arduino Modul: BME680</a>	2026/05/12 18:40	<a href="#">code, c, 2026, arduino, bme680, sensor, i2c, comunication</a>
• <a href="#">lamaPLC: AS5600 Magnetic Induction Angle Measurement Sensor Module</a>	2026/05/13 00:06	<a href="#">communication, i2c, as5600, as-5600, magnetic, induction, angle, sensor</a>
• <a href="#">lamaPLC: Bi-Directional Logic Level Converter 3.3V ↔ 5V</a>	2026/04/12 00:34	<a href="#">bi-directional, logic level converter, i2c, uart, spi</a>
• <a href="#">LamaPLC: BMP/BME Bosch Temperature/Humidity/Pressure sensors with I<sup>2</sup>C communication</a>	2026/04/23 21:52	<a href="#">bme280, bme680, bme688, bmp180, bmp280, hw-611, hw611, bosch, temperature, humidity, pressure, sensor, arduino, i2c, communication, ai, cjmcu, volatile organic compounds, vocs, volatile sulfur compounds, vscs, iaq</a>
• <a href="#">LamaPLC: CJMCU-219/INA-219 breakout board/IC with I<sup>2</sup>C communication</a>	2026/04/23 21:52	<a href="#">cjmcu-219, ina-219, ina219, breakout board, i2c, communication, sensor, voltage, current, arduino, code, cjmcu</a>
• <a href="#">LamaPLC: CJMCU-3216 / AP-3216 integrated digital ambient light and proximity sensor module/IC with I<sup>2</sup>C communication</a>	2026/04/23 21:52	<a href="#">cjmcu-3216, cjmcu, ap-3216, ap3216, ambient light, proximity, sensor, arduino, code, i2c, communication</a>
• <a href="#">lamaPLC: CJMCU-811 CCS811 Gas Sensor (VOCs TVOC CO<sub>2</sub>)</a>	2026/04/23 21:52	<a href="#">cjmcu-811, ccs811, gas, sensor, vocs, tvoc, eco2, co2, arduino, air quality metal oxide, mox, i2c, micropython, rp2040-eth</a>
• <a href="#">LamaPLC: D6T Omron Non-Contact Thermal Sensors with I<sup>2</sup>C communication</a>	2026/04/23 21:52	<a href="#">d6t, d6t-32l, d6t-44l, d6t-8l, d6t-1a, omron, non-contact, thermal, sensor, i2c, arduino, code</a>
• <a href="#">LamaPLC: DPS Infineon Temperature/Pressure sensors with I<sup>2</sup>C communication</a>	2026/04/23 21:52	<a href="#">dps310, infineon, temperature, pressure, sensor, arduino, i2c, communication, code</a>
• <a href="#">lamaPLC: Energy, power, current, and voltage</a>	2025/05/31 23:32	<a href="#">i2c, i c, communication, arduino, energy, power, current, sensor, ina226</a>
• <a href="#">LamaPLC: ENS ScioSense Multi-gas sensors with I<sup>2</sup>C communication</a>	2026/04/23 21:52	<a href="#">ens160, sciosense, gas-quality, i2c, communication, sensor, arduino, code, eco2, tvoc, aqi, indoor air quality, iaq, co2, voc</a>

• <a href="#">lamaPLC: ESP32 / ESP8266</a>	2025/11/22 00:07	<a href="#">esp8266</a> , <a href="#">esp32</a> , <a href="#">esp32-c2</a> , <a href="#">esp32-c3</a> , <a href="#">esp32-c5</a> , <a href="#">esp32-c6</a> , <a href="#">esp32-c61</a> , <a href="#">esp32-h2</a> , <a href="#">esp32-s2</a> , <a href="#">esp32-s3</a> , <a href="#">esp32-p4</a> , <a href="#">espressif systems</a> , <a href="#">communication</a> , <a href="#">ethernet</a> , <a href="#">ip</a> , <a href="#">wi-fi</a> , <a href="#">thread</a> , <a href="#">zigbee</a> , <a href="#">matter</a> , <a href="#">homekit</a> , <a href="#">bluetooth</a> , <a href="#">mqtt</a> , <a href="#">adc</a> , <a href="#">spi</a> , <a href="#">uart</a> , <a href="#">i2c</a> , <a href="#">i2s</a> , <a href="#">rmt</a> , <a href="#">pwm</a> , <a href="#">usb</a> , <a href="#">usb otg</a> , <a href="#">twai</a>
• <a href="#">LamaPLC: Gas sensors</a>	2023/07/01 17:29	<a href="#">gas</a> , <a href="#">sensor</a> , <a href="#">i2c</a> , <a href="#">onewire</a> , <a href="#">communication</a> , <a href="#">mq-3</a> , <a href="#">mq-4</a> , <a href="#">mq-5</a> , <a href="#">mq-6</a> , <a href="#">mq-7</a> , <a href="#">mq-8</a> , <a href="#">mq-9</a> , <a href="#">mq-135</a> , <a href="#">gm-102b</a> , <a href="#">gm-302b</a> , <a href="#">gm-502b</a> , <a href="#">gm-702b</a> , <a href="#">alcohol</a> , <a href="#">ch4</a> , <a href="#">natural gas</a> , <a href="#">smoke</a> , <a href="#">lng</a> , <a href="#">co</a> , <a href="#">co2</a> , <a href="#">lpg</a> , <a href="#">h2</a> , <a href="#">iso-butane</a> , <a href="#">nox</a> , <a href="#">nh3</a> , <a href="#">benzene</a> , <a href="#">town gas</a> , <a href="#">formaldehyde</a> , <a href="#">propane</a> , <a href="#">humidity</a> , <a href="#">temperature</a> , <a href="#">voc</a> , <a href="#">grv gas sens v2</a>
• <a href="#">lamaPLC: GY-511 6DOF sensor module</a>	2026/03/22 01:44	<a href="#">stmicroelectronics</a> , <a href="#">lsm303dlhc</a> , <a href="#">i2c</a> , <a href="#">lsm303</a> , <a href="#">sensor</a> , <a href="#">gy-511</a> , <a href="#">6dof</a> , <a href="#">pololu</a> , <a href="#">module</a> , <a href="#">arduino</a>
• <a href="#">LamaPLC: GY-9250 MPU-9250/6500 9-axis Attitude Sensor Board</a>	2026/04/23 21:52	<a href="#">ak8963</a> , <a href="#">gy-9250</a> , <a href="#">mpu-9250</a> , <a href="#">9-axis</a> , <a href="#">motion detection</a> , <a href="#">magnetometer</a> , <a href="#">communication</a> , <a href="#">i c</a> , <a href="#">i2c</a> , <a href="#">spi</a>
• <a href="#">LamaPLC: HDC Texas Instruments Temperature/humidity sensors with I<sup>2</sup>C communication</a>	2026/04/23 21:52	<a href="#">sht21</a> , <a href="#">htu21</a> , <a href="#">si7021</a> , <a href="#">gy-21</a> , <a href="#">gy-213v</a> , <a href="#">hdc1080</a> , <a href="#">gy-213v-hdc1080</a> , <a href="#">cjmcu</a> , <a href="#">cjmcu-1080</a> , <a href="#">texas instruments</a> , <a href="#">temperature</a> , <a href="#">humidity</a> , <a href="#">sensor</a> , <a href="#">i2c</a> , <a href="#">communication</a> , <a href="#">arduino</a> , <a href="#">code</a>
• <a href="#">lamaPLC: HT16K33 display controller</a>	2026/04/23 21:51	<a href="#">i2c</a> , <a href="#">7-segment display</a> , <a href="#">display</a> , <a href="#">ht16k33</a> , <a href="#">arduino</a>
• <a href="#">LamaPLC: HTU TE Connectivity temperature/humidity sensors with I<sup>2</sup>C communication</a>	2026/04/23 21:52	<a href="#">htu</a> , <a href="#">htu31d</a> , <a href="#">htu21d</a> , <a href="#">htu20d</a> , <a href="#">sht20</a> , <a href="#">htu20</a> , <a href="#">sht21</a> , <a href="#">htu21</a> , <a href="#">si7021</a> , <a href="#">gy-21</a> , <a href="#">gy-213v</a> , <a href="#">hdc1080</a> , <a href="#">si702</a> , <a href="#">gy-20</a> , <a href="#">sht31</a> , <a href="#">htu31</a> , <a href="#">si7031</a> , <a href="#">gy-31</a> , <a href="#">te connectivity</a> , <a href="#">temperature</a> , <a href="#">humidity</a> , <a href="#">i2c</a> , <a href="#">communication</a> , <a href="#">sensor</a> , <a href="#">arduino</a> , <a href="#">code</a>
• <a href="#">lamaPLC: INA modules with Arduino libraries</a>	2026/04/23 21:52	<a href="#">i2c</a> , <a href="#">i c</a> , <a href="#">communication</a> , <a href="#">arduino</a> , <a href="#">energy</a> , <a href="#">power</a> , <a href="#">current</a> , <a href="#">monitor</a> , <a href="#">sensor</a> , <a href="#">ina219</a> , <a href="#">gy-219</a> , <a href="#">ina226</a> , <a href="#">gy-216</a> , <a href="#">ina228</a> , <a href="#">gy-228</a> , <a href="#">ina237</a> , <a href="#">ina238</a> , <a href="#">ina260</a> , <a href="#">ina3221</a> , <a href="#">ina</a>
• <a href="#">lamaPLC: INA226 - current/voltage/power monitor with I<sup>2</sup>C communication</a>	2026/04/23 21:52	<a href="#">i2c</a> , <a href="#">i c</a> , <a href="#">communication</a> , <a href="#">arduino</a> , <a href="#">energy</a> , <a href="#">power</a> , <a href="#">current</a> , <a href="#">monitor</a> , <a href="#">sensor</a> , <a href="#">ina226</a> , <a href="#">ina219</a> , <a href="#">ina</a>
• <a href="#">lamaPLC: LCD 1602/2004 with I<sup>2</sup>C communication</a>	2026/02/14 18:27	<a href="#">communication</a> , <a href="#">i2c</a> , <a href="#">display</a> , <a href="#">lcd</a> , <a href="#">1602</a> , <a href="#">2004</a> , <a href="#">hd44780</a> , <a href="#">pcf8574</a> , <a href="#">pcf8574t</a> , <a href="#">pcf8574at</a> , <a href="#">arduino</a>
• <a href="#">LamaPLC: MAX30100/MAX30102 Heart Rate Click Sensor Module</a>	2026/04/23 21:52	<a href="#">max30102</a> , <a href="#">max30100</a> , <a href="#">heart rate click</a> , <a href="#">sensor</a> , <a href="#">communication</a> , <a href="#">i2c</a> , <a href="#">arduino</a> , <a href="#">code</a>
• <a href="#">lamaPLC: MCP23017 / MCP23S17 16-Bit I/O Expander with Serial Interface I<sup>2</sup>C / SPI</a>	2026/04/23 21:52	<a href="#">communication</a> , <a href="#">i2c</a> , <a href="#">mcp23017</a> , <a href="#">mcp23s17</a> , <a href="#">spi</a> , <a href="#">i o expander</a> , <a href="#">serial</a> , <a href="#">cjmcu-2317</a> , <a href="#">cjmcu</a>

• <a href="#">lamaPLC: MLX90614 (GY-906) infrared non-contact thermometer</a>	2026/05/08 00:03	<a href="#">communication</a> , <a href="#">i2c</a> , <a href="#">temperature</a> , <a href="#">mlx90614</a> , <a href="#">gy-906</a> , <a href="#">modul</a> , <a href="#">infrared</a> , <a href="#">non-contact thermometer</a> , <a href="#">dsp</a> , <a href="#">pwm</a> , <a href="#">smbus</a> , <a href="#">hailege</a>
• <a href="#">lamaPLC: PCF857x I/O Expander chip/modul with I<sup>2</sup>C communication</a>	2026/05/14 15:21	<a href="#">communication</a> , <a href="#">i2c</a> , <a href="#">pcf857x</a> , <a href="#">pcf8574</a> , <a href="#">pcf8574a</a> , <a href="#">pcf8575</a> , <a href="#">i o expander</a> , <a href="#">i o extension</a> , <a href="#">nxp</a> , <a href="#">texas instruments</a>
• <a href="#">LamaPLC: Pixart PAJ7620U2 Gesture recognition sensors/module with I<sup>2</sup>C communication</a>	2026/04/23 21:52	<a href="#">paj7620u2</a> , <a href="#">gy-paj7620</a> , <a href="#">pixart</a> , <a href="#">gesture recognition</a> , <a href="#">i2c</a> , <a href="#">communication</a> , <a href="#">sensor</a> , <a href="#">arduino</a> , <a href="#">code</a>
• <a href="#">lamaPLC: RP2040_ETH_Modul: I<sup>2</sup>C scanner</a>	2026/05/12 16:20	<a href="#">code</a> , <a href="#">micropython</a> , <a href="#">2026</a> , <a href="#">rp2040 eth</a> , <a href="#">i2c</a> , <a href="#">comunication</a>
• <a href="#">lamaPLC: RP2040_ETH_Modul: MLX90614 simple</a>	2026/05/12 17:06	<a href="#">code</a> , <a href="#">micropython</a> , <a href="#">2026</a> , <a href="#">rp2040 eth</a> , <a href="#">i2c</a> , <a href="#">communication</a> , <a href="#">mlx90614</a>
• <a href="#">lamaPLC: RP2040_ETH_Modul: Read BME 680/688 sensor data</a>	2026/05/12 21:06	<a href="#">code</a> , <a href="#">micropython</a> , <a href="#">2026</a> , <a href="#">rp2040 eth</a> , <a href="#">bme680</a> , <a href="#">i2c</a> , <a href="#">sensor</a> , <a href="#">communication</a>
• <a href="#">lamaPLC: RP2040_ETH_Modul: Read BME 680/688 sensor data and store in Modbus input registers</a>	2026/05/12 18:58	<a href="#">code</a> , <a href="#">micropython</a> , <a href="#">2026</a> , <a href="#">rp2040 eth</a> , <a href="#">bme680</a> , <a href="#">i2c</a> , <a href="#">sensor</a> , <a href="#">communication</a>
• <a href="#">LamaPLC: SC16IS750 / SC16IS752: One or two serial (UART) ports from microcontroller via I<sup>2</sup>C or SPI communication</a>	2026/04/23 21:52	<a href="#">cjmcu-750</a> , <a href="#">cjmcu-752</a> , <a href="#">cjmcu</a> , <a href="#">nxp</a> , <a href="#">sc16is750</a> , <a href="#">sc16is752</a> , <a href="#">uart</a> , <a href="#">serial</a> , <a href="#">i2c</a> , <a href="#">spi</a> , <a href="#">modul</a> , <a href="#">converter</a> , <a href="#">arduino</a> , <a href="#">code</a>
• <a href="#">LamaPLC: SGP Sensirion TVOC/VOC sensors with I<sup>2</sup>C communication</a>	2026/04/15 19:41	<a href="#">sgp30</a> , <a href="#">sgp40</a> , <a href="#">sgp41</a> , <a href="#">sensirion</a> , <a href="#">gas-sensor</a> , <a href="#">i2c</a> , <a href="#">communication</a> , <a href="#">sensor</a> , <a href="#">arduino</a> , <a href="#">code</a> , <a href="#">eco2</a> , <a href="#">voc</a> , <a href="#">tvoc</a> , <a href="#">indoor air quality</a> , <a href="#">iaq</a> , <a href="#">nox</a> , <a href="#">hydrogen</a>
• <a href="#">LamaPLC: SHT Sensirion Temperature/humidity sensor with I<sup>2</sup>C communication</a>	2026/04/23 21:52	<a href="#">sht20</a> , <a href="#">sht21</a> , <a href="#">sht25</a> , <a href="#">sht30</a> , <a href="#">sht31</a> , <a href="#">sht35</a> , <a href="#">sht40</a> , <a href="#">gy21</a> , <a href="#">temperature</a> , <a href="#">humidity</a> , <a href="#">i2c</a> , <a href="#">communication</a> , <a href="#">sensor</a> , <a href="#">arduino</a> , <a href="#">code</a>
• <a href="#">lamaPLC: Signal level converters</a>	2026/02/14 23:47	<a href="#">pca9306</a> , <a href="#">i2c</a> , <a href="#">voltage</a> , <a href="#">level</a> , <a href="#">converter</a>
• <a href="#">lamaPLC: st756x display drivers</a>	2026/05/20 16:17	<a href="#">display</a> , <a href="#">driver</a> , <a href="#">i2c</a> , <a href="#">spi</a> , <a href="#">lcd</a> , <a href="#">cog</a> , <a href="#">oled</a> , <a href="#">st7565</a> , <a href="#">st7567</a> , <a href="#">gm12864</a> , <a href="#">gm12864-59n</a> , <a href="#">gm12864-03a</a> , <a href="#">gm12864-01a</a> , <a href="#">gme12864-41</a>
• <a href="#">lamaPLC: TCA9548A (HW617); Low-Voltage 8-Channel I<sup>2</sup>C Switch Module</a>	2026/02/14 23:51	<a href="#">tca9548a</a> , <a href="#">hw617</a> , <a href="#">i2c</a> , <a href="#">switch</a> , <a href="#">communication</a> , <a href="#">expansion board</a> , <a href="#">arduino</a>
• <a href="#">lamaPLC: TM1637 7-segment display</a>	2026/02/14 18:26	<a href="#">i2c</a> , <a href="#">7-segment display</a> , <a href="#">display</a> , <a href="#">tm1637</a> , <a href="#">arduino</a>
• <a href="#">LamaPLC: TOFnnnC STMicroelectronics Time-of-Flight (ToF) sensors with I<sup>2</sup>C communication</a>	2026/04/23 21:52	<a href="#">tof050c</a> , <a href="#">vl6180</a> , <a href="#">tof200c</a> , <a href="#">vl53l0x</a> , <a href="#">tof400c</a> , <a href="#">vl53l1x</a> , <a href="#">stmicroelectronics</a> , <a href="#">time-of-flight</a> , <a href="#">tof</a> , <a href="#">i2c</a> , <a href="#">communication</a> , <a href="#">sensor</a> , <a href="#">arduino</a> , <a href="#">code</a>
• <a href="#">LamaPLC: VL53Lnn STMicroelectronics time-of-flight (ToF) laser-ranging sensors with I<sup>2</sup>C communication</a>	2026/04/23 21:52	<a href="#">vl53l0x</a> , <a href="#">vl53l1x</a> , <a href="#">vl53l0 1xv2</a> , <a href="#">gy-530</a> , <a href="#">time-of-flight</a> , <a href="#">tof</a> , <a href="#">laser-ranging</a> , <a href="#">i2c</a> , <a href="#">communication</a> , <a href="#">sensor</a> , <a href="#">arduino</a> , <a href="#">code</a>
• <a href="#">LamaPLC: VL6180X STMicroelectronics Time-of-Flight (ToF) sensor with I<sup>2</sup>C communication</a>	2026/04/23 21:52	<a href="#">vl6180x</a> , <a href="#">stmicroelectronics</a> , <a href="#">time-of-flight</a> , <a href="#">tof</a> , <a href="#">i2c</a> , <a href="#">communication</a> , <a href="#">sensor</a> , <a href="#">arduino</a> , <a href="#">code</a>

- [lamaPLC: XGZP68xx: Silicon Pressure Sensors/Module](#) 2026/05/15 15:17  
 communication, i2c, sensor, modul, pressure, cfsensor, xgzp68xx, xgzp6810d, xgzp6857d, xgzp6859d, xgzp6887d, xgzp6897d, xgzp6899a, piezoresistive, capacitive
- [Magnetic angle sensors](#) 2026/03/05 21:19  
 magnetic angle sensor, magnetic flux, sensor, spi, i2c, pwm, communication, modul, as5047p, as5600, mt6701, mt6816, mt6835, tle5012b, amr, gmr, tmr, anisotropic magnetoresistive
- [SSH1106/SSD1306 OLED Display with I<sup>2</sup>C communication](#) 2026/02/14 18:27  
 i2c, oled, display, ssd1306, sh1106, ssh1106, arduino, cmos

communication, i2c, sensor, modul, pressure, CFSensor, XGZP68xx, XGZP6810D, XGZP6857D, XGZP6859D, XGZP6887D, XGZP6897D, XGZP6899A, piezoresistive, capacitive

This page has been accessed for: Today: 1, Until now: 57

From:  
<https://www.lamaplc.com/> - **lamaPLC**

Permanent link:  
<https://www.lamaplc.com/doku.php?id=sensor:xgzp68>

Last update: **2026/05/15 16:15**

